

---

## Cell Phone Signal Booster - DCS1800 1000Sqm


---

### Main Features:

- Working System: DCS1800
- Frequency Range: Up link DCS 1710-1785(MHz); Downlink 1805-1880(MHz)
- Effective Coverage: 1000 Square Metres

### Images:

---

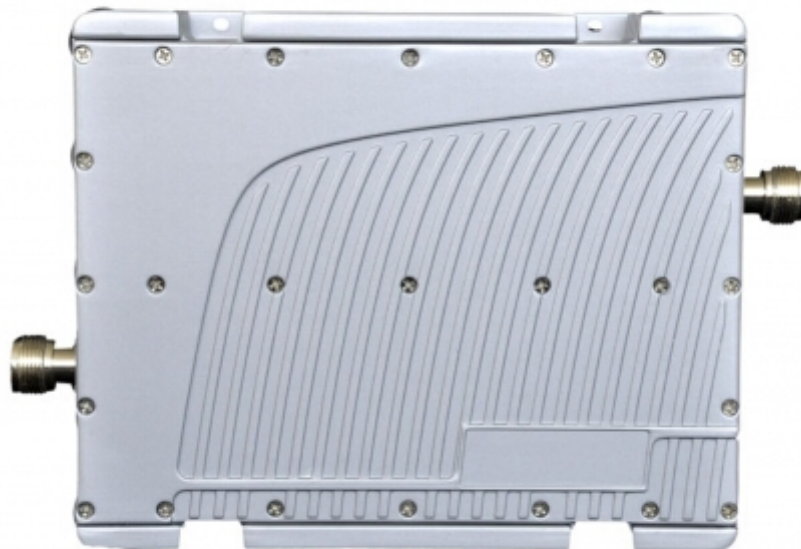



---

## Technic Specifications:

- Working System: DCS1800
- Frequency Range: Up link DCS 1710-1785(MHz); Downlink 1805-1880(MHz)
- Effective Coverage: 1000 Square Metres
- Power supply: AC110?220V±10% 45?55Hz
- Gain(dB): DCS Up link 53; DCS Downlink 58; Gain adjustable range? MGC≥30dB
- Pass band ripple: DCS:15 dB
- I/O impedance: 50V/N Connector
- I/O return loss: ≤- 10 dB
- Noise figure: ≤- 8 dB
- Intermodulation attenuation(Po=13dBm): ≥40dBc
- Transmission Delay: ≤0.5us
- Guard band rejection : DCS (BW-58dB) ≤104MHz ?(BW-60dB) ≤107MHz
- Dimension: 158 x 136 x 37 mm (L x W x D)

## Package Included:

- 1pc Cell Phone Signal Booster - DCS1800 1000Sqm
- 1pc Power Adapter (100-240V)
- Indoor Antenna
- Outdoor Antenna
- Coaxial Cable 2M
- Coaxial Cable 10M

- Indoor Antenna Accessories and Screws
- Manual

## Important Notice:

If you are not so sure about the Cell/Mobile Phone Frequency range you are going to booster, please kindly check your local cellular frequency at: <http://worldtimezone.net/gsm.html>

[product\_url:] [Cell Phone Signal Booster - DCS1800 1000Sqm](#)

[pdf\_url:] [http://www.cellmobilephonejammer.com/CellPhoneSignalBoosterDCS18001000Sqm451\\_22.pdf](http://www.cellmobilephonejammer.com/CellPhoneSignalBoosterDCS18001000Sqm451_22.pdf)