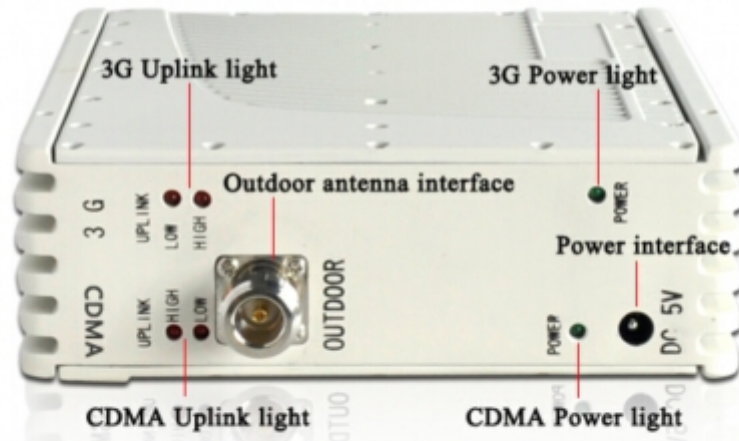

Mobile Phone Signal Booster - CDMA800 3G

Main Features:

- Working System: CDMA800, 3G
- Frequency Range: Up Link: CDMA 824-849/ 3G 1920-1980(MHz); Downlink: CDMA 869-894/3G 2110-2170(MHz)

Images:





Technic Specifications:

- Frequency Range: Up Link: CDMA 824-849/ 3G 1920-1980(MHz); Downlink: CDMA 869-894/3G 2110-2170(MHz)
- Gain(dB): CDMA/3G:65/53; CDMA/3G:70/58
- Gain adjustable range:MGC \geq 30dB
- Output power(dBm): \geq 17
- Power supply:AC110?220V \pm 10% 45?55Hz
- Pass band ripple:CDMA/3G,15dB
- Guard band rejection:CDMA/3G (BW-58dB) \leq 104MHz (BW-70dB) \leq 107 MHz
- I/O impedance:50?/N Connector
- I/O return loss: \leq -10dB
- Noise figure: \leq -8dB
- Inter-modulation attenuation(Po=13dBm): \geq 40dBc
- Transmission Delay: \leq 0.5us
- Ambient temperature:-10??50?
- Reliability:To the GB6993-86 standard
- Electromagnetic compatibility:To the ETS300 694-4 standard
- Product weight:1.6kg
- Dimension:158mm*136mm*37mm

Package Included:

- 1pc Mobile Phone Signal Booster - CDMA800 3G
- 1pc Indoor Antenna
- 1pc Outdoor Antenna
- 1pc Coaxial Cable 2M
- 1pc Coaxial Cable 10M
- 1pc Power Adapter
- Indoor Antenna Accessories and Screws

Important Notice:

If you are not so sure about the Cell/Mobile Phone Frequency range you are going to booster, please kindly check your local cellular frequency at: <http://worldtimezone.net/gsm.html>

[product_url:] [Mobile Phone Signal Booster - CDMA800 3G](#)

[pdf_url:] http://www.cellmobilephonejammer.com/MobilePhoneSignalBoosterCDMA8003G443_22.pdf